



passive fire protection and insulation

Suppliers of passive fire products,  
acoustic and specialist insulation  
Manufacturers of the Safire® Fire Stopping Range

Uniclass	EPIC
CI/SIB	

## **PYRO**PLEX® **PIPE WRAPS**



**Pyroplex® Pipe Wraps seal closed flammable pipes from 55mm to 160mm diameter and are located inside a wall or floor structure.**

- Fire rating up to 4 hours.
- Intumescent is totally unaffected by water.
- Intumescent is robust - 'non-flaking' and difficult to tear.
- Identification on each product for full traceability.
- Simple to use - easy to install



# PIPE WRAPS

Suitable for fitting to:

Concrete, masonry and porous concrete wall constructions.


Concrete floor construction.

Waste water and fresh water plastic pipes.

Wraps sizes:

Part Number	Pipe Outside Diameter (mm)	Wrap Length (mm)	Diameter of Hole in Wall or Floor (mm)
PPW 55	55	175	70
PPW 82	82	260	98
PPW 110	110	350	130
PPW 125	125	470	155
PPW 160	160	506	190

Examples of Wraps Locations:

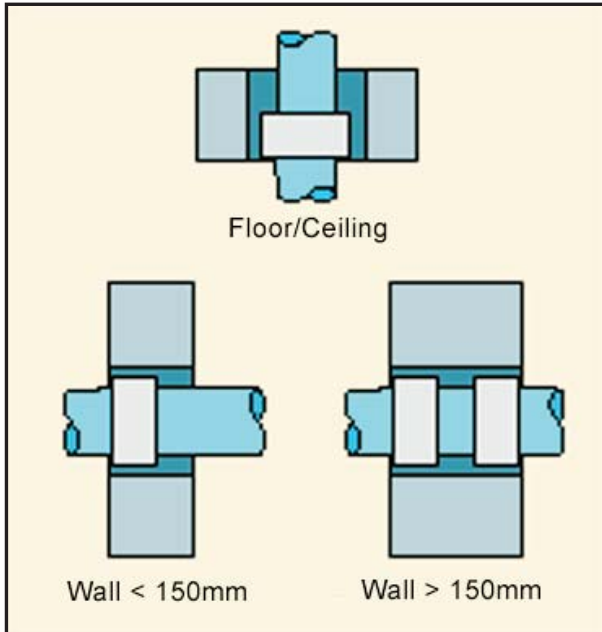

### Installation Instructions

1. The wall or floor must be of solid construction. The recess hole must be the correct size. See table above.
2. Fix wrap around the pipe using adhesive tab and slide along pipe into wall/floor cavity to a depth of 5mm min./10mm max.
3. After insertion the cavity around the pipe can be made good with filler. The surface can then be decorated.
4. The identification label should be attached to the pipe to show a wrap has been fitted.

### Testing

Tested BS476 Part 20:1987 and other International Standards.

Health & Safety

According to 91/155/EEC Revision No.1.

### On-Site Support

A comprehensive design, advice and support service is offered to architects, specifiers and contractors ensuring trouble free installation.

Your distributor:



**Fireus Ltd.**

Unit 6 Thetis Road, Lune Industrial Estate, Lancaster, LA1 5QP

Tel. 01524 388898 | Fax. 01524 383724 | Email. [info@fireus.co.uk](mailto:info@fireus.co.uk) | Web. [www.fireus.co.uk](http://www.fireus.co.uk)