




Suppliers of passive fire products, acoustic and specialist insulation Manufacturers of the Safire® Fire Stopping Range

# Safire® Socket/Switch Box Putty Pads

**120** mins

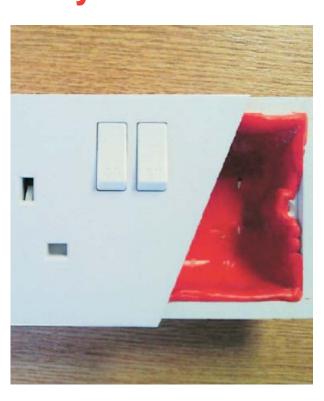

Safire® Socket Box Putty Pads are an easy to apply fire and sound rated sealant supplied as a non-setting putty. The pad is hand workable, reuseable and reserviceable due to its non-setting properties.

Socket Box Putty Pads will prevent the passage of smoke, flames, sound and air movement through the electrical socket. They are shaped for use on both single and double electrical sockets installations in dry lining walls.

The pads are supplied in a cross shape for internal installation in a socket or switch box.

For fire resistance only, the Socket/Switch Box Putty Pad achieves full fire performance without additional insulation between the studs

• 2 hour fire rating

Fireus Ltd.

- Excellent acoustic properties
- Can be easily installed on first or second fix



# **Installation Instructions**



1. Remove the paper from one side of the pad. (Cut off corners for single box installation).



2. Make a slit for the cable and pass the cable through the pad.



3. Push the pad fully inside the socket box.



4. Pay special attention to ensure the pad fits into the corners of the box.



5. Trim off any excess material and proceed as normal installation

### **Technical Details**

### Shape & Size

Internal Cross Shape

Double Box: 230mm x 170mm approx. Single Box: 170mm x 170mm approx.

## Sound Insulating

67 (-2;-7) Rw (C;Ctr) (dB) Tested in accordance with BS EN ISO 140-3:1995 Calculated in accordance with BS EN ISO 717-1:1997

### Fire Performance

Tested in accordance with:

BS EN 1364-1:1999

BS EN 1366-3:2004

Up to 120 minutes fire resistance in 100mm and 130mm gypsum board drywalls\*

(\* A full approval of the product is contained in Certifire Certificate of Approval No. CF831)

Other products in the Fireus Products range:

FIRE BARRIERS: Total Comfort Rock Fibre Fire Blanket

FIRE STOPPING: Compound

Fire Collars Barriers (Batts) Sealants Fire Pillows Expansion Joints Flamestop60 Flamestop FSI

**THERMAL:** Industrial thermal and acoustic insulation

For information on any of the above, or the name of your nearest distributor, please contact our sales department on tel. 01524 388898.

Alternatively, product information is available from our web site at <a href="https://www.fireus.co.uk">www.fireus.co.uk</a>

Your distributor:





